


SINGLE



Features

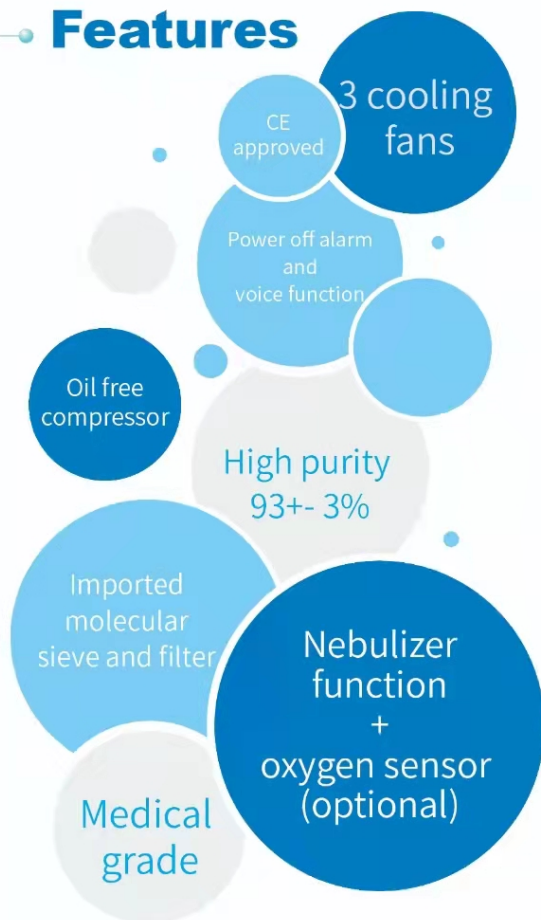

Specification

Delivery Rate	1 to 10 LPM <small>(Lower delivery rates available for low application)</small>
Outlet Pressure	<60 kPa
Electrical Rating	220 V, 50 Hz/110 V,60Hz
Oxygen Percentage	93%±3%
Operating Environment Range	Temperature 5 to 40°C°C Humidity 15% to 95% <small>Atmospheric pressure 50-106 kpa (7.3-15.4 psi)</small>
Weight	19.2kg
Sound Level <small>(ISO 8359:1996 from front)</small>	≤55 dbA
Dimensions	330mm(L) x320mm(W) x620mm(H)
Operating System	Time Cycle / Pressure Swing
Pressure Relief Valve	250 kPa±50 kPa